




ASA 150-ASA 300 ASA 600 DÖKÜM ÇELİK  
SEPET TİPİ PİSLİK TUTUCULAR  
Cast Steel Basket Type Strainers Figure ST 8010-ST 8020

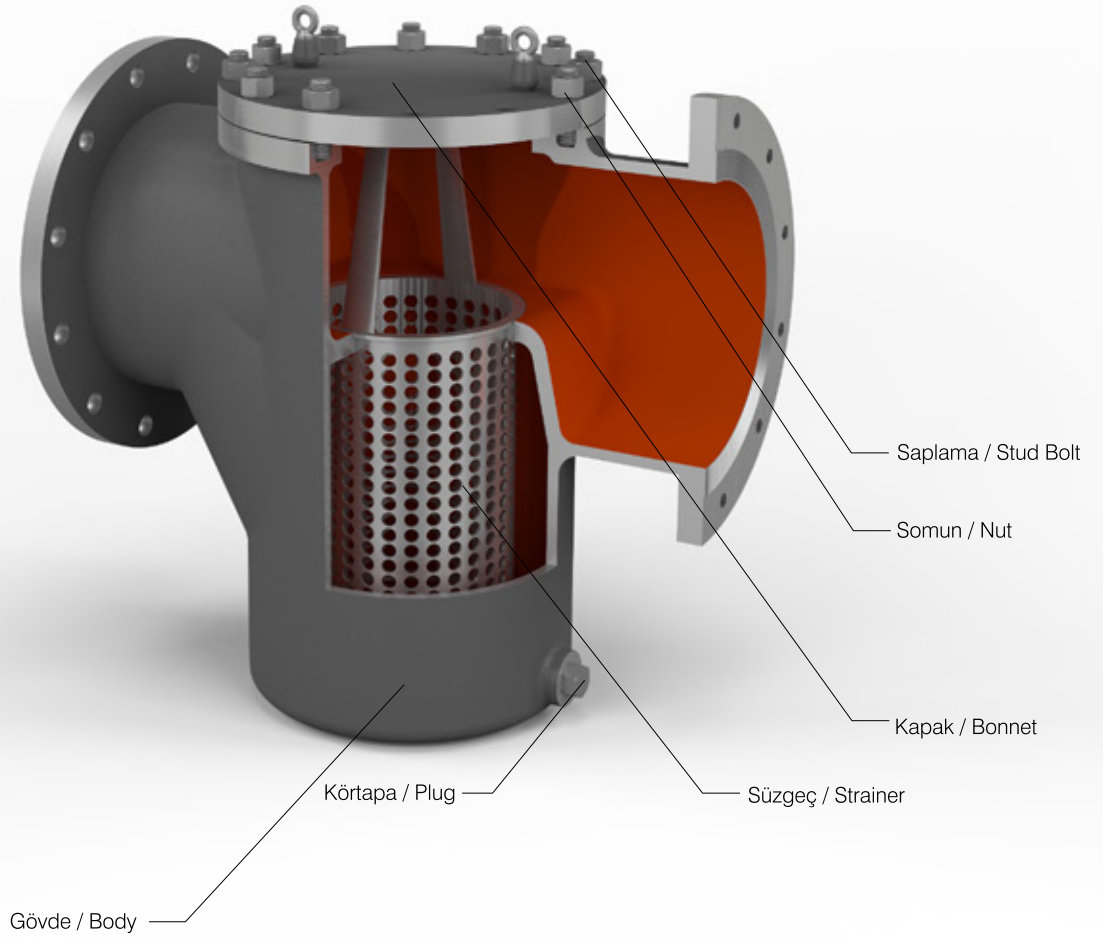


Wall thicknesses are according to ASME B16.34  
Flange dimensions are according to ANSI B16.5  
Inspection and test standard: API 598

# ASA 150-ASA 300 ASA 600 DÖKÜM ÇELİK SEPET TİPİ PİSLİK TUTUCULAR Cast Steel Basket Type Strainers Figure ST 8010-ST 8020



## MALZEME SPESİFİKASYONLARI / Material Specifications

| PARÇA ADI / PART NAME                       |                                 |  |
|---|---------------------------------|--|
| 1 GÖVDE<br>Body                             | Cast Steel                      |  |
| 2 SÜZGEÇ<br>Strainer                        | Stainless Steel                 |  |
| 3 CONTA<br>Gasket                           | Graphite Or Spiral Wound Gasket |  |
| 4 KAPAK<br>Bonnet                           | Fabricated Steel                |  |
| 5 KAPAK SAPLAMALARI<br>Bonnet Stud Bolt     | Cr Mo Steel                     |  |
| 6 KAP SAP SOMUNLARI<br>Bonnet Stud Bolt Nut | Carbon Steel                    |  |
| 7 KÖRTAPA<br>Plug                           | Carbon Steel                    |  |
| 8 YAY<br>Spring                             | Stainless Steel                 |  |
| 9 CIVATA<br>Bolt                            | Chrome                          |  |
| 10 İSİM PLAKA<br>Name Plate                 | Aluminium                       |  |

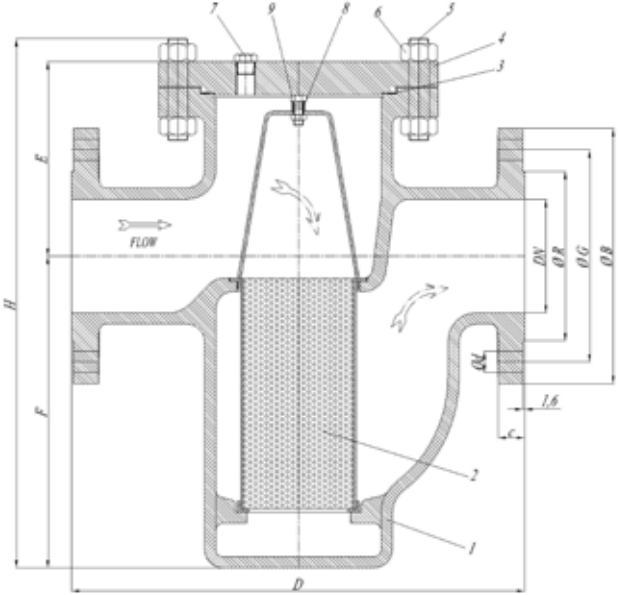

| ASA 150 Figure ST 8010 | ÖLÇÜ / SIZE |       | Ø B   | Ø G   | Ø R  | C    | Ø d   | D    | H   | E     | F    | App.W |
|------------------------|-------------|-------|-------|-------|------|------|-------|------|-----|-------|------|-------|
|                        | inch        | mm    | mm    | mm    | mm   | mm   | mm    | mm   | mm  | mm    | mm   | mm    |
|                        | 2           | 50    | 152   | 120,6 | 92,1 | 19,1 | 19    | 305, | -   | -     | -    | -     |
| 3                      | 80          | 190   | 152,4 | 127   | 23,9 | 19   | 356   | 530  | 195 | 310   | 50   |       |
| 4                      | 100         | 229   | 190,5 | 157,2 | 23,9 | 19   | 406   | 475  | 175 | 280   | 60   |       |
| 6                      | 150         | 279,4 | 141,3 | 215,9 | 25,4 | 22,2 | 500   | 520  | 140 | 355   | 74   |       |
| 8                      | 200         | 343   | 298,4 | 269,9 | 28,6 | 22,2 | 560   | -    | -   | -     | 260  |       |
| 10                     | 250         | 406   | 362   | 323,8 | 30,2 | 25,4 | 800   | 995  | 333 | 630   | 335  |       |
| 12                     | 300         | 483   | 431,8 | 381   | 31,8 | 25,4 | 850   | 1095 | 362 | 700   | 483  |       |
| 14                     | 350         | 533   | 476,2 | 412,8 | 35   | 28,5 | 787,5 | 795  | 250 | 523,5 | 360  |       |
| 16                     | 400         | 597   | 539,8 | 469,9 | 36,6 | 28,5 | 1100  | 1410 | 468 | 900   | 1130 |       |
| 18                     | 450         | 635   | 577,8 | 533,4 | 39,7 | 31,8 | 1181  | 1560 | 498 | 1020  | -    |       |

| ASA 300 Figure ST 8020 | ÖLÇÜ / SIZE |     | Ø B   | Ø G   | Ø R   | C    | Ø d  | D    | H   | E    | F    | App.W |
|------------------------|-------------|-----|-------|-------|-------|------|------|------|-----|------|------|-------|
|                        | inch        | mm  | mm    | mm    | mm    | mm   | mm   | mm   | mm  | mm   | mm   | mm    |
|                        | 4           | 100 | 254   | 200   | 157,2 | 31,8 | 22,2 | 470  | -   | -    | -    | -     |
| 6                      | 150         | 318 | 269,9 | 215,9 | 36,6  | 22,2 | 620  | -    | -   | -    | -    | -     |
| 8                      | 200         | 381 | 330,2 | 269,9 | 41,1  | 25,4 | 630  | 825  | 297 | 500  | 255  |       |
| 10                     | 250         | 444 | 387,4 | 323,8 | 47,8  | 28,5 | 900  | 1032 | 370 | 630  | 460  |       |
| 12                     | 300         | 521 | 450,8 | 381   | 80,8  | 31,8 | 1000 | -    | -   | -    | -    | -     |
| 14                     | 350         | 584 | 514,4 | 412,8 | 53,8  | 31,8 | 1050 | -    | -   | -    | -    | -     |
| 16                     | 400         | 648 | 571,5 | 469,9 | 57,2  | 35   | 1200 | -    | -   | -    | -    | -     |
| 18                     | 450         | 711 | 628,6 | 530,4 | 60,5  | 35   | -    | -    | -   | -    | -    | -     |
| 20                     | 500         | 775 | 685,8 | 584,2 | 63,5  | 35   | -    | -    | -   | -    | -    | -     |
| 24                     | 600         | 914 | 812,8 | 962,2 | 69,9  | 41,1 | 1345 | 1474 | 440 | 6000 | 2100 |       |